


ALFO® Standard Blind Rivet

Steel galvanized Steel galvanized
Countersunk Head | open

DIN EN ISO
15980

CAD
DATA
ONLINE

Series
707

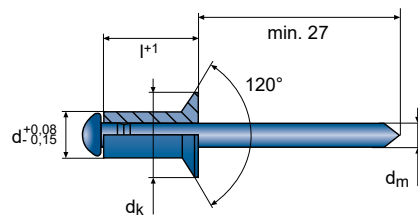

C4C [1.0303]

d	l+1	$\frac{d}{l+1}$	No.	
3,0	10,0	5,0 - 7,0	10707300100	500
	8,0	3,0 - 5,5	10707300080	500
	6,0	1,5 - 3,5	10707300060	500
d_k 6,0 -0,4	d_m 1,9	3,1 mm	1000 N	1340 N
3,2	8,0	3,0 - 5,5	10707320080	500
	6,0	1,5 - 3,5	10707320060	500
d_k 6,2 -0,4	d_m 2,0	3,3 mm	1180 N	1560 N
4,0	16,0	8,0 - 12,5	10707400160	500
	12,0	6,5 - 9,0	10707400120	500
	10,0	5,0 - 7,0	10707400100	500
	8,0	3,0 - 5,5	10707400080	500
	7,0	2,0 - 4,5	10707400070	500
	6,0	1,5 - 3,5	10707400060	500
d_k 7,5 -0,5	d_m 2,3	4,1 mm	2100 N	2800 N

d	l+1	$\frac{d}{l+1}$	No.	
4,8	18,0	9,5 - 13,5	10707480180	500
	16,0	8,0 - 12,0	10707480160	500
	14,0	6,5 - 10,0	10707480140	500
	12,0	5,0 - 8,5	10707480120	500
	10,0	3,0 - 6,5	10707480100	500
	8,0	2,0 - 4,5	10707480080	500
d_k 9,0 -0,5	d_m 2,7	4,9 mm	3180 N	4220 N
5,0	30,0	19,5 - 25,0	10707500300	250
	25,0	15,0 - 20,0	10707500250	250
	20,0	11,0 - 15,5	10707500200	500
	16,0	8,0 - 12,0	10707500160	500
	12,0	6,0 - 8,5	10707500120	500
	10,0	4,0 - 6,5	10707500100	500
	8,0	2,0 - 4,5	10707500080	500
	d_k 9,3 -0,5	d_m 2,9	5,1 mm	3320 N
6,4	10,0	3,0 - 5,0	10707640100	250
d_k 13,4 -1,8	d_m 3,8	6,5 mm	4920 N	5700 N