

# ALFO® Standard Blind Rivet


Stainless Steel A2    Stainless Steel A2

Dome Head | open

DIN EN ISO  
**15983**

CAD  
DATA  
ONLINE

Series  
**708**

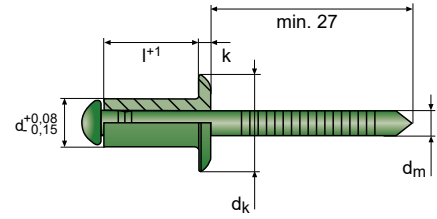

[1.4301]

d	l+1	$\frac{k}{d}$	No.	
<b>2,4</b>	6,0	0,5 - 3,5	10708024060	500
	<b>dk</b> 5,0 -0,2 <b>dm</b> 1,5 <b>k</b> 0,8 ±0,1     2,5 mm     1000 N     1500 N			
<b>3,0</b>	16,0	8,5 - 12,0	10708030160	500
	12,0	6,5 - 8,5	10708030120	500
	10,0	5,0 - 7,0	10708030100	500
	8,0	3,0 - 5,0	10708030080	500
	6,0	0,5 - 3,0	10708030060	500
<b>dk</b> 6,3 -0,7 <b>dm</b> 1,9 <b>k</b> 0,8 ±0,2     3,1 mm     2050 N     2600 N				
<b>3,2</b>	18,0	12,0 - 14,0	10708032180	500
	16,0	8,5 - 12,0	10708032160	500
	12,0	6,5 - 8,5	10708032120	500
	10,0	5,0 - 7,0	10708032100	500
	8,0	3,0 - 5,0	10708032080	500
	6,0	0,5 - 3,0	10708032060	500
<b>dk</b> 6,5 -0,7 <b>dm</b> 1,9 <b>k</b> 0,8 ±0,2     3,3 mm     2050 N     2600 N				
<b>4,0</b>	25,0	16,0 - 21,0	10708040250	500
	20,0	14,0 - 16,0	10708040200	500
	18,0	12,0 - 14,0	10708040180	500
	16,0	10,0 - 12,0	10708040160	500
	14,0	8,5 - 10,5	10708040140	500
	12,0	6,5 - 8,5	10708040120	500
	10,0	4,5 - 6,5	10708040100	500
	8,0	2,5 - 4,5	10708040080	500
6,0	1,0 - 2,5	10708040060	500	
<b>dk</b> 8,0 -1,0 <b>dm</b> 2,5 <b>k</b> 1,0 ±0,3     4,1 mm     2750 N     3550 N				

d	l+1	$\frac{k}{d}$	No.	
<b>4,8</b>	20,0	13,0 - 16,0	10708048200	500
	18,0	11,0 - 13,0	10708048180	500
	16,0	8,0 - 11,0	10708048160	500
	14,0	7,0 - 9,5	10708048140	500
	12,0	6,0 - 8,0	10708048120	500
	10,0	4,0 - 6,0	10708048100	500
8,0	1,5 - 4,0	10708048080	500	
<b>dk</b> 9,5 -1,0 <b>dm</b> 2,9 <b>k</b> 1,1 ±0,3     4,9 mm     4250 N     5400 N				
<b>5,0</b>	40,0	30,0 - 35,0	10708050400	250
	35,0	25,0 - 30,0	10708050350	250
	30,0	20,0 - 25,0	10708050300	250
	25,0	15,0 - 20,0	10708050250	250
	20,0	13,0 - 15,0	10708050200	500
	18,0	11,0 - 13,0	10708050180	500
	16,0	8,0 - 11,0	10708050160	500
	14,0	7,0 - 9,5	10708050140	500
	12,0	6,0 - 8,0	10708050120	500
	10,0	4,0 - 6,0	10708050100	500
	8,0	2,0 - 4,0	10708050080	500
<b>dk</b> 9,5 -0,8 <b>dm</b> 2,9 <b>k</b> 1,1 ±0,3     5,1 mm     5000 N     6400 N				
<b>6,0</b>	16,0	7,5 - 11,0	10708060160	250
	12,0	5,5 - 7,5	10708060120	250
	10,0	2,0 - 5,5	10708060100	250
<b>dk</b> 12,0 -1,2 <b>dm</b> 3,8 <b>k</b> 1,5 ±0,4     6,1 mm     6300 N     8250 N				
<b>6,4</b>	30,0	19,0 - 23,0	10708064300	250
	25,0	15,5 - 19,5	10708064250	250
	20,0	10,5 - 14,5	10708064200	250
	18,0	9,0 - 13,0	10708064180	250
	16,0	7,5 - 11,5	10708064160	250
	14,0	6,0 - 9,5	10708064140	250
	12,0	4,0 - 7,5	10708064120	250
10,0	2,5 - 6,0	10708064100	250	
<b>dk</b> 13,0 -1,5 <b>dm</b> 3,8 <b>k</b> 1,8 ±0,4     6,5 mm     7250 N     9335 N				