

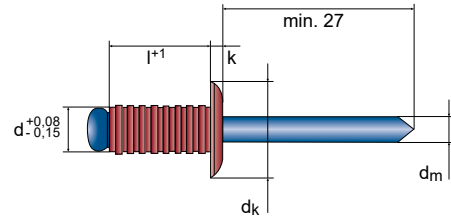

ALFO® Standard Blind Rivet -grooved-

Aluminium  Steel galvanized 








Dome Head | open





CAD
DATA
ONLINE

Series
712



EN AW-5754 [AlMg3]

d	l +1	min. bore depth	No.		
3,2	10,0	13,0	10712032100	500	
dk 6,5 -0,7	dm 1,7	k 0,8 ±0,15	 3,3 mm	 600 N	 1000 N
4,0	12,0	15,0	10712040120	500	
	8,0	11,0	10712040080	500	
dk 8,0 -0,7	dm 2,0	k 1,0 ±0,15	 4,1 mm	 1000 N	 1350 N

d	l +1	min. bore depth	No.		
4,8	16,0	20,0	10712048160	500	
	10,0	14,0	10712048100	500	
dk 9,5 -0,7	dm 2,7	k 1,1 ±0,15	 4,9 mm	 1350 N	 1820 N