
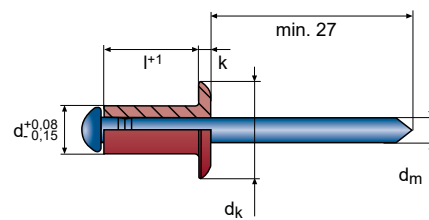


ALFO® Standard Blind Rivet

Aluminium Steel galvanized

Dome Head | open



2,0 - 3,2 mm EN AW-5019 [AlMg5]

4,0 - 7,8 mm EN AW-5754 [AlMg3]

d	l ⁺¹		No.	
2,4	12,0	8,0 - 10,0	10700024120	500
	10,0	6,0 - 8,0	10700024100	500
	8,0	3,5 - 6,0	10700024080	500
	6,0	1,5 - 4,0	10700024060	500
	4,0	0,5 - 2,0	10700024040	500
	3,0	0,5 - 1,0	10700024030	500

dk 5,0^{-0,7} **dm** 1,5 **k** 0,55^{±0,15} 2,5 mm 380 N 600 N

3,0	25,0	16,0 - 21,5	10700030250	500
	20,0	13,0 - 16,5	10700030200	500
	18,0	12,0 - 14,5	10700030180	500
	16,0	9,0 - 12,5	10700030160	500
	12,0	7,0 - 9,0	10700030120	500
	10,0	5,0 - 7,5	10700030100	500
	8,0	3,0 - 6,0	10700030080	500
	7,0	3,0 - 5,0	10700030070	500
	6,0	1,5 - 4,0	10700030060	500
	5,0	1,0 - 3,0	10700030050	500
4,0	0,5 - 2,0	10700030040	500	

dk 6,3^{-0,7} **dm** 1,7 **k** 0,8^{±0,2} 3,1 mm 740 N 1000 N

d	l ⁺¹		No.	
3,2	18,0	10,0 - 14,5	10700032180	500
	16,0	9,0 - 13,0	10700032160	500
	14,0	8,5 - 10,5	10700032140	500
	12,0	7,0 - 9,0	10700032120	500
	10,0	5,0 - 7,5	10700032100	500
	8,0	3,0 - 5,5	10700032080	500
	6,0	1,5 - 3,5	10700032060	500
	5,0	1,0 - 2,5	10700032050	500
	4,0	0,5 - 1,5	10700032040	500

dk 6,5^{-0,7} **dm** 1,9 **k** 0,8^{±0,2} 3,3 mm 750 N 1220 N

4,0	35,0	25,5 - 31,0	10700040350	500
	30,0	20,5 - 26,0	10700040300	500
	25,0	15,5 - 21,0	10700040250	500
	20,0	12,5 - 16,5	10700040200	500
	18,0	12,0 - 14,5	10700040180	500
	16,0	8,5 - 12,5	10700040160	500
	14,0	8,5 - 11,0	10700040140	500
	12,0	6,5 - 9,0	10700040120	500
	10,0	5,0 - 7,0	10700040100	500
	8,0	3,0 - 5,5	10700040080	500
	7,0	3,0 - 4,5	10700040070	500
	6,0	1,0 - 3,5	10700040060	500
	5,0	1,0 - 2,5	10700040050	500
	4,0	0,5 - 1,5	10700040040	500

dk 8,0^{-1,0} **dm** 2,0 **k** 1,0^{±0,3} 4,1 mm 1250 N 1800 N



d	l ⁺¹		No.	
4,8	40,0	29,0 - 34,5	10700048400	250
	35,0	24,5 - 29,5	10700048350	250
	30,0	20,0 - 25,0	10700048300	500
	25,0	15,0 - 20,5	10700048250	500
	20,0	12,0 - 15,5	10700048200	500
	18,0	11,5 - 13,5	10700048180	500
	16,0	8,0 - 12,0	10700048160	500
	14,0	7,5 - 10,0	10700048140	500
	12,0	6,0 - 8,0	10700048120	500
	10,0	4,0 - 6,5	10700048100	500
	9,0	2,5 - 6,0	10700048090	500
	8,0	2,5 - 5,0	10700048080	500
6,0	1,0 - 3,0	10700048060	500	

d_k 9,5 -1,0 d_m 2,7 k 1,1 ±0,3 4,9 mm 1640 N 2200 N

5,0	50,0	39,5 - 45,0	10700050500	250
	45,0	34,5 - 40,0	10700050450	250
	40,0	29,0 - 35,0	10700050400	250
	35,0	24,5 - 30,0	10700050350	250
	30,0	20,0 - 25,0	10700050300	500
	25,0	15,0 - 20,5	10700050250	500
	20,0	12,0 - 15,5	10700050200	500
	18,0	11,5 - 13,5	10700050180	500
	16,0	8,0 - 12,0	10700050160	500
	14,0	7,5 - 10,0	10700050140	500
	12,0	6,0 - 8,0	10700050120	500
	10,0	4,0 - 6,5	10700050100	500
8,0	2,5 - 5,0	10700050080	500	
6,0	1,0 - 3,0	10700050060	500	

d_k 9,5 -0,8 d_m 2,7 k 1,1 ±0,3 5,1 mm 1820 N 2400 N

d	l ⁺¹		No.	
6,0	50,0	38,0 - 43,0	10700060500	250
	30,0	20,0 - 25,0	10700060300	250
	28,0	19,5 - 22,5	10700060280	250
	25,0	15,0 - 20,0	10700060250	250
	22,0	14,5 - 17,0	10700060220	500
	20,0	11,0 - 15,0	10700060200	500
	18,0	10,5 - 13,0	10700060180	500
	16,0	7,0 - 11,0	10700060160	500
	12,0	5,0 - 7,5	10700060120	500
	10,0	3,0 - 5,5	10700060100	500
	8,0	1,0 - 3,5	10700060080	500

d_k 12,0 -1,2 d_m 3,2 k 1,5 ±0,4 6,1 mm 2660 N 3500 N

6,4	30,0	18,0 - 24,0	10700064300	250
	25,0	14,0 - 19,0	10700064250	250
	20,0	10,0 - 14,5	10700064200	250
	18,0	10,0 - 13,0	10700064180	250
	16,0	6,0 - 11,0	10700064160	250
	12,0	2,5 - 7,0	10700064120	250

d_k 13,0 -1,4 d_m 3,6 k 1,8 ±0,4 6,5 mm 2880 N 4600 N

7,8	26,0	16,5 - 20,5	10700078260	250
	22,0	12,5 - 16,5	10700078220	250
	18,0	9,5 - 12,5	10700078180	250
	15,0	4,0 - 9,5	10700078150	250

d_k 14,0 d_m 3,7 k 2,0 8,0 mm 6600 N 9550 N