


ALFO® Standard Blind Rivet

Aluminium  Stainless Steel A2



Countersunk Head | open



in accordance with
DIN EN ISO
15978

CAD
DATA
ONLINE

Series
702

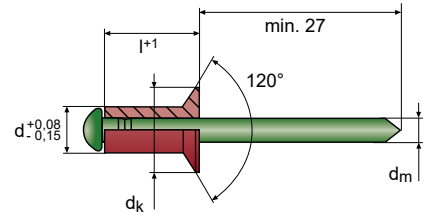

2,4 - 3,2 mm EN AW-5019 [AlMg5]

4,0 - 5,0 mm EN AW-5754 [AlMg3]

d	l+1		No.	
2,4	6,0	1,5 - 4,0	10702240060	500
dk 4,5 ^{0,2}	dm 1,5	2,5 mm	420 N	660 N
3,0	10,0	5,0 - 7,5	10702300100	500
	8,0	3,5 - 6,0	10702300080	500
	6,0	1,5 - 4,0	10702300060	500
dk 6,0 ^{-0,4}	dm 1,7	3,1 mm	740 N	1000 N

d	l+1		No.	
4,0	16,0	8,5 - 12,5	10702400160	500
	12,0	6,5 - 9,0	10702400120	500
	10,0	5,0 - 7,0	10702400100	500
	8,0	2,0 - 5,5	10702400080	500
	7,0	2,0 - 4,5	10702400070	500
dk 7,5 ^{-0,5}	dm 2,0	4,1 mm	1250 N	1580 N
5,0	20,0	12,0 - 15,5	10702500200	500
	16,0	8,0 - 12,0	10702500160	500
	12,0	6,0 - 8,0	10702500120	500
	10,0	2,0 - 6,5	10702500100	500
dk 9,3 ^{-0,5}	dm 2,7	5,1 mm	1820 N	2100 N